


# MULTI-MONTI®

THE INNOVATIVE FASTENING SYSTEM  
FOR CONCRETE AND MASONRY

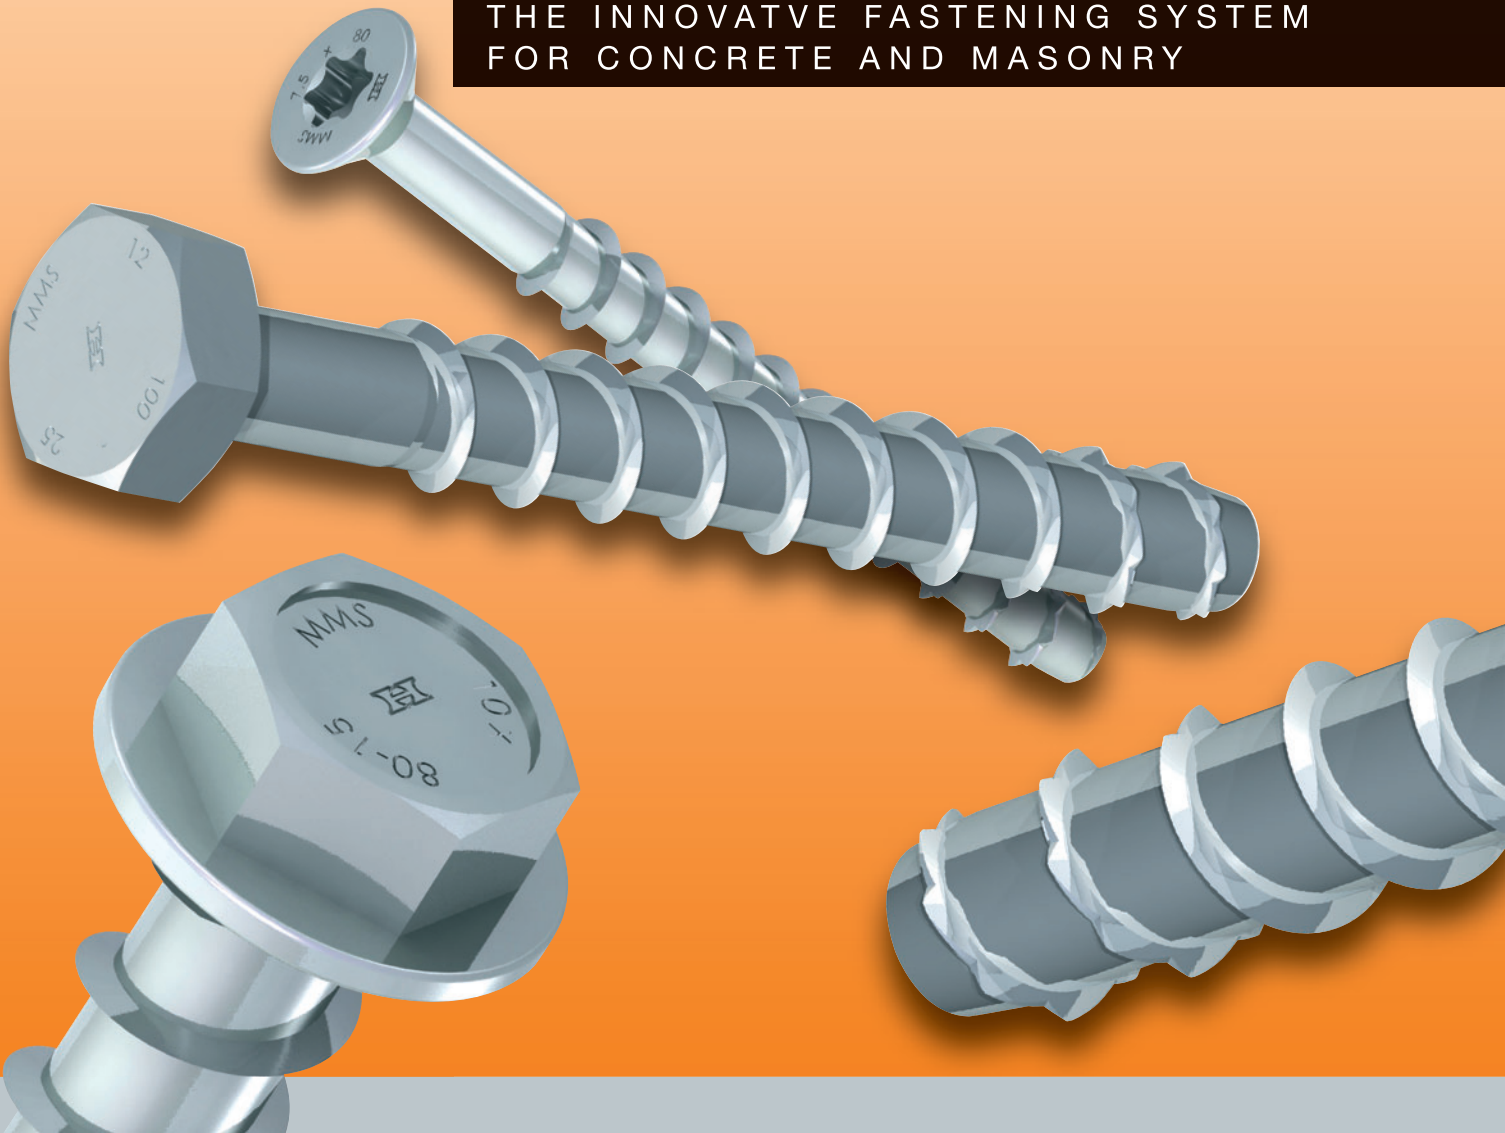


## Advantages

- Fast and easy mountage
- High security level
- No time wasting, the anchor will bear loads immediately
- Can be completely removed
- No torque control required
- Easy power-tool handling possible
- Approved and monitored product



**Safe and secure**

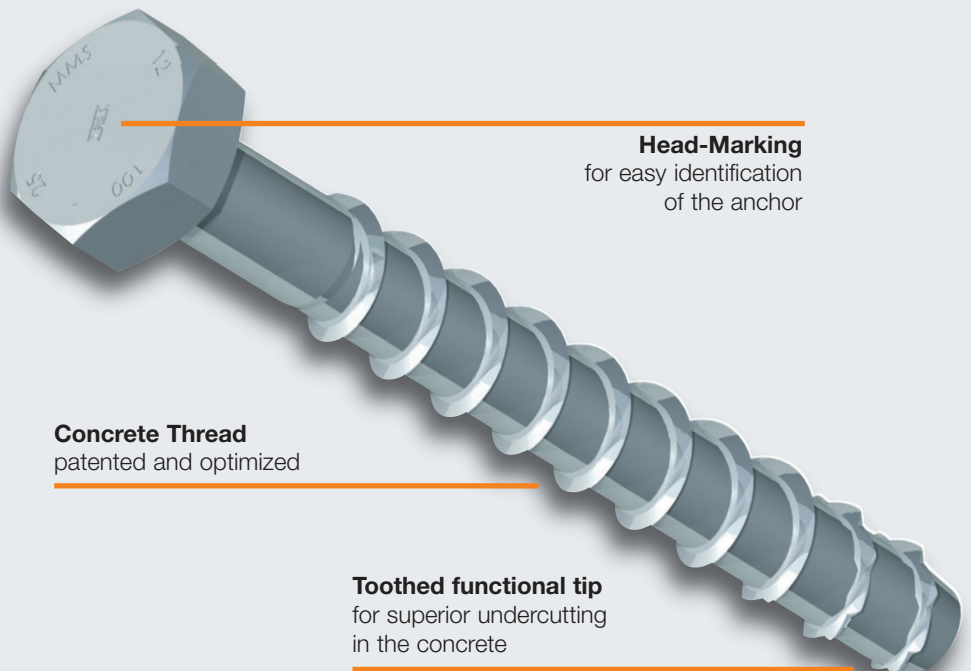



















**Head-Marking**  
for easy identification  
of the anchor

**Concrete Thread**  
patented and optimized

**Toothed functional tip**  
for superior undercutting  
in the concrete

## Product Range

	<b>MMS-S Hexagon Head</b> <b>bright zinc plated</b> Length (mm): 40 to 160 Diameter (mm): 6,0 / 7,5 / 10,0 / 12,0 / 14,0 / 16,0 / 20,0	
	<b>MMS-S Hexagon Head, incl. Washer acc. DIN 440</b> <b>bright zinc plated</b> Length (mm): 180 to 320 Diameter (mm): 12,0	
	<b>MMS-SS Hexagon Head with combined Washer</b> <b>bright zinc plated</b> Length (mm): 50 to 100 Diameter (mm): 6,0 / 7,5 / 10,0 / 12,0	
	<b>MMS-I Screw-in-anchors with internal Metric thread</b> <b>bright zinc plated</b> Length (mm): 60 to 85 Diameter (mm): 7,5 / 10,0	
	<b>MMS-St Screw-in-anchors with metric stud</b> <b>bright zinc plated</b> Length (mm): 60 to 160 Diameter (mm): 6,0 / 7,5 / 10,0	
	<b>MMS-MS Flange head</b> <b>bright zinc plated</b> Length (mm): 45 to 60 Diameter (mm): 7,5	
	<b>MMS-P Pan-head</b> <b>bright zinc plated</b> Length (mm): 30 to 70 Diameter (mm): 5,0 / 6,0 / 7,5 / 10,0	
	<b>MMS-F Countersunk</b> <b>bright zinc plated</b> Length (mm): 30 to 160 Diameter (mm): 5,0 / 6,0 / 7,5 / 10	
	<b>HMS-KS Reduced Countersunk</b> <b>bright zinc plated</b> Length (mm): 40 and 50 Diameter (mm): 5,0	
	<b>HMS-R Eye-bolt-anchor</b> <b>bright zinc plated</b> Length (mm): 40 Diameter (mm): 6,0	
	<b>MMS-S Hexagon Head, phosphated tip</b> <b>stainless steel A4 1.4401 self-colour</b> Length (mm): 65 to 120 Diameter (mm): 7,5 / 10,0 / 12,0	 
	<b>MMS-P Pan Head, phosphated tip</b> <b>stainless steel A5 1.4571 self-colour</b> Length (mm): 75 to 115 Diameter (mm): 7,5	 
	<b>MMS-F Countersunk, phosphated tip</b> <b>stainless steel A5 1.4571 self-colour</b> Length (mm): 75 to 115 Diameter (mm): 7,5	 
	<b>MULTI-MONTI®-TimberConnect</b> <b>DP-coated</b> Length (mm): 100 to 160 Diameter (mm): 7,5 / 10,0 / 12,0	

For further information feel free to contact us

## Application Examples



fixing of railing




Pipe mounting



Fixing of cable clamp



Screw-In-Anchor



MULTI-MONTI®-TimberConnect



**HECO-Schrauben GmbH & Co. KG**  
Dr.-Kurt-Steim-Straße 28  
D-78713 Schramberg  
Telefon: +49 (0)74 22 / 9 89-0  
Telefax: +49 (0)74 22 / 9 89-200  
E-Mail: [info@heco-schrauben.de](mailto:info@heco-schrauben.de)  
Internet: [www.heco-schrauben.de](http://www.heco-schrauben.de)

Your specialist dealer: